

B100-SA

MINI STANDALONE BIOMETRIC READER

B100-SA is a simple one-door standalone biometric system (or 2 doors when used with DINRTT). The reader programming is quick and easy. It can store up to 100 finger templates (98 users and 2 for programming). It has one integrated relay output and one exit button input. If secure installation is needed, the reader can be connected to a remote relay unit in a secured area, which also plays the role of exit push button. Complete setup and programming can be done by scrolling on the sensor.



CAN BE CONNECTED TO REMOTE RELAY UNIT FOR SECURE INSTALLATION

FEATURES

- Capacity: 100 Finger templates (98 users, 1 Admin, 1 Installer)
- Push Button Input: Yes
- Output: 1 x Relay (2A, 24V AC/DC)
- Connection: Cable (1m) and resin potted
- Door Time: Pulse (1, 3, 5, 10, 20, 30, 60 s) or Toggle (ON/OFF)
- Entry Mode: Finger
- Image resolution: Up to 508 dpi
- Sensor: Swipe Capacitive
- Programming: By scrolling on the sensor
- Admin/Installer fingers: 1 Admin and 1 Installer finger
- Backlight ON/OFF: Yes
- Buzzer ON/OFF: Yes
- Consumption: 100 mA
- Indication: Tricolor LED
- Mounting: Surface mount
- IP factor: IP65
- Operating temperature: -15°C to +50°C

Black Edition

Product available in Black ABS



ACCESS DENIED




IDLE MODE



ACCESS GRANTED


DIMENSIONS

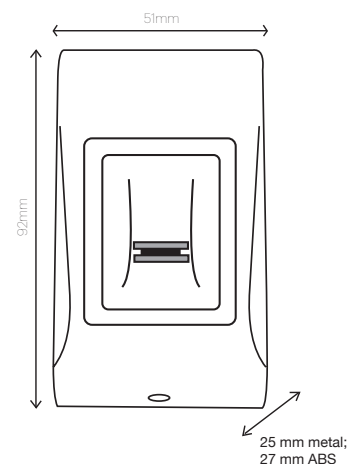


VERSIONS



B100S-SA
Silver - Metal




B100C-SA
Charcoal - Metal




B100BK-SA
Black - ABS


Tricolor Indication uni-LED



Access Granted



Idle Mode



Access Denied



WITH REMOTE RELAY AT SECURED AREA

