




DS-1663ZJ

Ceiling Mounting Bracket Indoor/Outdoor

Features:


- Aluminum alloy material with surface spray treatment
- General design for indoor/outdoor
- Design of cable entrance hole
- Complementary rubber blanket pad for waterproofness

Dimension:

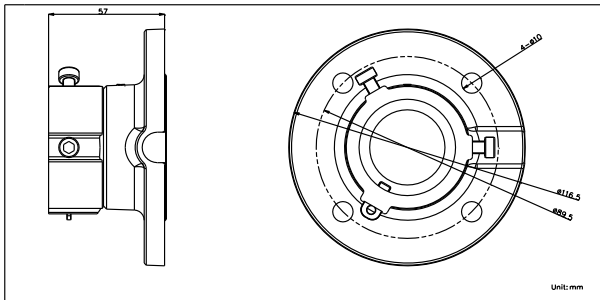


Installation steps:

- ① Choose the appropriate wall to mount the ceiling plate, and rubber blanket should be used when assembling outdoors




A: Waterproof rubber pad

- ③ Fix with tightening screw, thread the cable and Install the speed dome




- ② Fix adaptor to ceiling plate



B: Tightening screw

C: Adaptor

- ④ Tighten up the set screw and complete the installation



D: Set screw

Order model:

DS-1663ZJ

Parameters:

| | |
|-----------|---|
| Model | DS-1663ZJ |
| Parameter | Pendent Mounting Bracket In/Outdoor |
| Color | Hik white |
| Feature | Suitable for speed dome ceiling mount (not suitable for DS-2AE-714) |
| Material | Aluminum alloy |
| Dimension | Φ 116.5 × 57mm |
| Weight | 380g |

Notice:

- The bracket should be installed on the flat surface of a wall
- The wall must be capable of supporting more than 3 times the total load of the camera and the mount.
- The maximum load capacity of the mount is 30KG

Note: The actual bracket may vary from the picture above.