



Key Feature

- IP video intercom kit for villa or house, only one call button
- DS-KD8003-IME1(B)/Surface x1
- DS-KH6320-WTE1 x1
- 4 port standard PoE switch x1
- 16GB TF card x1

Specification

| Door station | |
|----------------------------|---|
| Operation system | Embedded Linux operation system |
| Flash | 32 MB |
| RAM | 256 MB |
| Door station | |
| Camera | 2MP HD camera |
| Night vision | Low illumination IR supplement mode:3 m |
| Backlight compensation | Support |
| Digital noise reduction | Support |
| WDR | Support |
| Field of view | Horizontal: 146° , Vertical: 82° |
| Video Compression Standard | H.264 |
| Motion detection | Support |
| Door station | |
| Audio input | Built-in omnidirectional microphone |

| Audio output | Built-in loudspeaker |
|----------------------------|---|
| Audio quality | Noise suppression and echo cancellation |
| Audio compression standard | G.711 U, G.711 A |
| Audio compression Rate | 64 Kbps |
| Audio intercom | Two-way audio communication |
| Door station | |
| Network protocol | TCP/IP, RSTP |
| Wired network | 10/100 Mbps Ethernet |
| Door station | |
| RS-485 | 1 (1 for Hikvision's sub module communication) |
| Network interface | 1 RJ45 |
| Alarm input | 4 (2 exit buttons and 2 door contacts by default) |
| Debugging port | 1 |
| Lock control | 2 (2 relay, max to 30 V, 2 A) |
| TAMPER switch | 1 |
| Power interface | 12 VDC power output (max to 12 V, 150 mA) |
| Door station | |
| Power consumption | ≤ 5 W |
| Working temperature | -40° C to 60° C (-40° F to 140° F) |

| | |
|------------------|---|
| Working humidity | 10% to 95% |
| Dimension | Device: 98 mm × 100 mm × 42 mm (3.86" × 3.94" × 1.65") Cover: 117 × 107 × 4 mm (4.61" × 4.21" × 0.16") Installation Frame: 117 × 107 × 32.7mm (4.61" × 4.21" × 1.29") |
| Installation | Surface mounting |
| Protection level | IP65 |
| Indicator | 0 |
| Power supply | IEEE802.3af, standard PoE 12 VDC |

| Indoor station | |
|-----------------------|--|
| Power consumption | ≤ 6 W |
| Working temperature | -10 ° C to 55 ° C (14 ° F to 131 ° F) |
| Working humidity | 10% to 90% |
| Dimension (L x W x H) | 200 mm × 140 mm × 23.6 mm (7.9" × 5.5" × 0.9") |

Available Model

DS-KIS602(B)

| Indoor station | |
|------------------|---------------------------------|
| Operation system | Embedded Linux operation system |
| Memory | 128 MB |
| Flash | 32 MB |


| Indoor station | |
|--------------------|----------------------------|
| Display screen | 7-inch colorful TFT screen |
| Display resolution | 1024 × 600 |
| Operation method | Capacitive touch screen |

| Indoor station | |
|----------------------------|---|
| Audio input | Built-in omnidirectional microphone |
| Audio output | Built-in loudspeaker |
| Audio quality | Noise suppression and echo cancellation |
| Audio compression standard | G.711 U, G.711 A |
| Audio compression Rate | 64 Kbps |

| Indoor station | |
|------------------|-----------------------------------|
| Wired network | 10/100 Mbps self-adaptive |
| Wireless network | Wi-Fi 802.11 b/g/n |
| Protocol | TCP/IP, SIP, RTSP |
| RS-485 | 1 RJ-45 10/100 Mbps self-adaptive |

| Indoor station | |
|----------------|--------------------------------------|
| RS-485 | 1 |
| Alarm input | 8-ch alarm inputs |
| Relay output | 2 |
| TF card | Max to 32 G, SD 2.0 or lower version |

Dimension

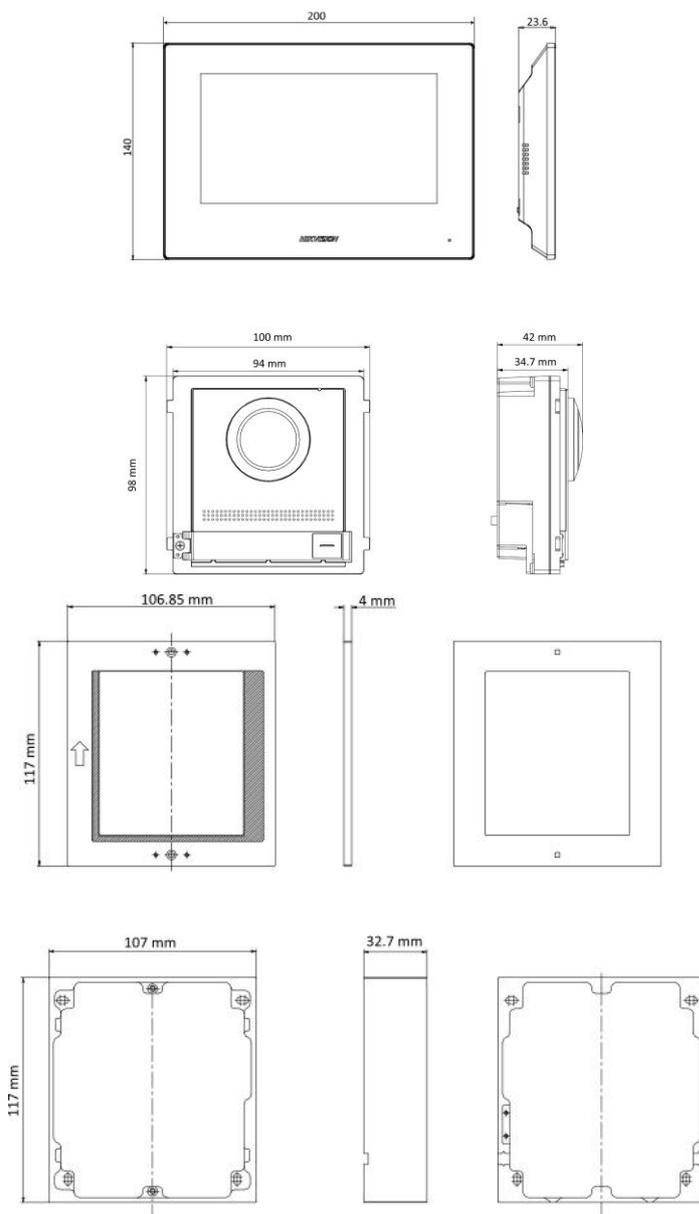

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

