

DC107

Inbouwcontact, zelfborgend met flens, met sabotagelus, 2,5m, wit, $\pm 9\text{mm}$, NC.

Contacts

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Details

- Special design for steel mounting
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC107

Inbouwcontact, zelfborgend met flens, met sabotagelus, 2,5m, wit, ±9mm, NC.

Technical specifications

General

Application type	Recessed mount
Contact type	NC
Connectivity	4 wires, 2 m

Wired/wireless


Wired-wireless	Wired
Operating gap	9 mm (max.)

Físico

Dimensions magnet	24 x 40 mm (Ø x H)
Dimensions contact / sensor	24 x 29 mm (Ø x H)
Diameter	19 mm
Borehole diameter	19.1 mm
Colour	White

Regulatory

EN50131 grade	Grade 2
Certification	UL/ULC

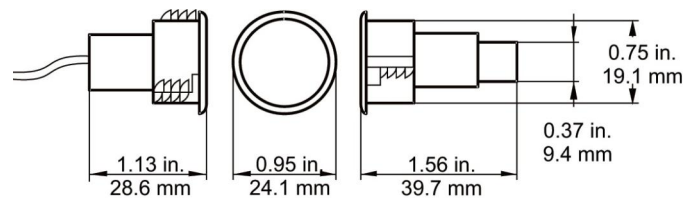

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 8 November 2022 - 9:34