



## MEX280SV3


### Technical characteristics

Installation	Surface mounted
Break-in resistance (keeper's pressure)	280 daN
IP protection	No
Block width:	52 mm
Block depth:	24 mm
Block height:	241 mm
Counterplate width :	45 mm
Counterplate depth:	13 mm
Counterplate height:	156 mm

### Electrical characteristics

Voltage DC	12-24 V DC
Consumption DC	12V 0,27 A
	24V 0,18 A
Continuous duty DC	ED 100%
Door status	Si
LED	 
Timer	0, 5, 10 o 20 s 5 s by default

### Electric connection scheme

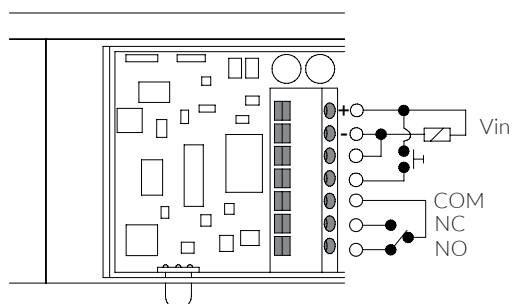

### Types of installation

