

ME280SW1

Technical Data


Holding force	2800 N
Type (Embedded / Surface mounted)	S
Delay time	—
Closing delay time	—
Opening delay time	—
LED	Yes
Door status	Yes
Fire	—

Electrical Data

(at 20°C)

Coil type	W
Electrical information	12V/24V DC
Connection	Wiring
Duty DC	ED 100%
Rated operational voltage tolerance	+/- 10%
12V DC (Initial)	—
12V DC (Maintenance)	500 mA
24V DC (Maintenance)	250 mA
Power	6W
Transient voltage suppressor (TVS)	Yes

Electric connection scheme

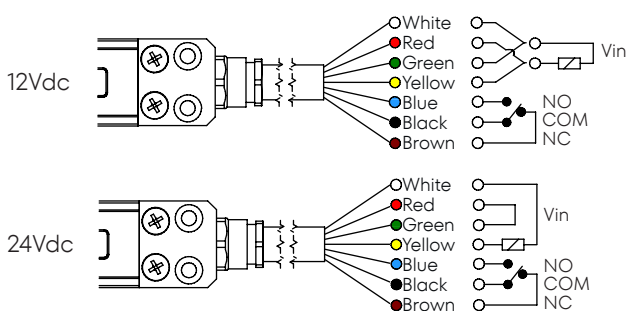

Product certificate

Regulation	—
Normative	—
CPR certificate	—
Classification	—
Normative	UNE EN 60529:2018
Classification	IP65
Low voltage directive	2014/35/UE
Directive (EMC)	2014/30/UE
RoHs Directive	2011/65/UE
REACH regulation	1907/2006

Types of installation

