

## ENTRANCE PANEL

### BI-02FB

EAN: 5060514913123 (BLACK)  
 EAN: 5060514913130 (GOLD)  
 EAN: 5060514913116 (SILVER)

### BI-04FB

EAN: 5060514913147 (BLACK)  
 EAN: 5060514913154 (GOLD)  
 EAN: 5060514913161 (SILVER)

### BI-08FB


EAN: 5060514913178 (BLACK)  
 EAN: 5060514913185 (GOLD)  
 EAN: 5060514913192 (SILVER)

### BI-12FB

EAN: 5060514913208 (BLACK)  
 EAN: 5060514913215 (GOLD)  
 EAN: 5060514913222 (SILVER)

The unique multi-apartment entrance panel has a stylish design.

Panel is available in gold, silver and black colours. It is equipped with a wide-angle camera and supports BAS-IP UKEY mobile access. Using this panel, it is possible to make direct calls to both internal monitors and the concierge. The device fits perfectly into the interior of a small office or cottage.

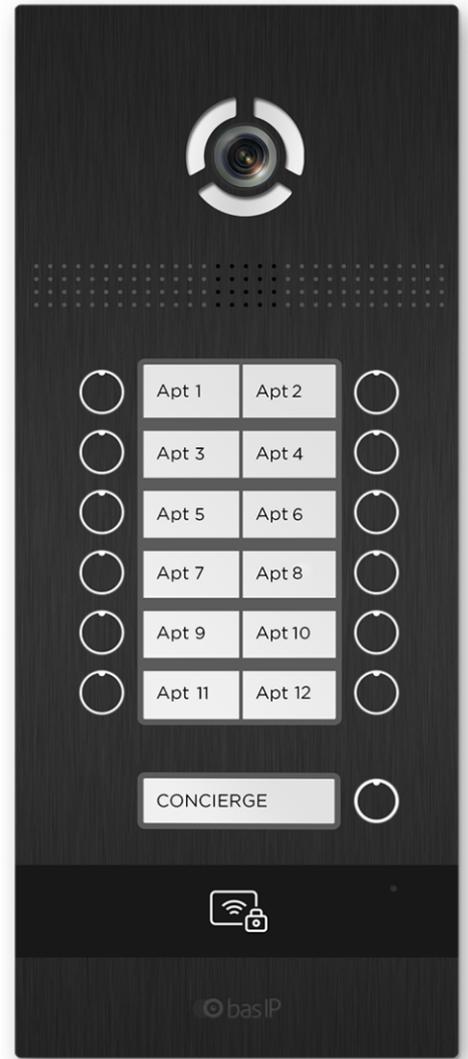

BI-02FB

BI-04FB

BI-08FB

BI-12FB



## Main features

- Panel type: Multi-apartment.
- Keypad: Backlight mechanical buttons.
- Camera: 1/4".
- Angle: 110° (horizontal).
- Resolution: 2 Mp.
- Output video: Half HD (1280 × 720), H.264 Main Profile.
- Night backlight: 6 LEDs.
- Light sensitivity: 0,01 Lux.
- Protection class: IP65.
- IK-code: IK08.
- Working temperature: -40 — +65 °C.
- Power consumption: 6,5 W, in standby — 3,6 W.
- Power supply: +12 V DC, PoE.
- Body: Aluminum.
- Colors: Silver, Gold, Black.
- Dimensions for installation: 142 × 358 × 58 mm.
- Size of the panel: 156 × 370 × 50 mm.
- Installation: Flush, surface with BR-AA12 Bracket.

## Functionality

- Interface: Multi-language graphical and WEB interface.
- Lock opening:
  - By means of a monitor
  - Face Recognition Identification
  - By QR code
  - By guest link
  - By Pin
  - By access card
  - By license plates
  - The BAS-IP Intercom app
  - The BAS-IP Link app
  - The BAS-IP UKEY app
  - From API
- Access control integration: WIEGAND-26+ output
- Shortcut buttons: Concierge button.
- Number of call melodies: 4 polyphonic melodies, ability to customize melodies for different actions.
- Authentication: Separate password for settings, WEB – interface and RTSP stream.
- Talking mode: Full duplex.
- Additionally:
  - Software Link support
  - SIP P2P
  - Built-in relay
  - Open API