

Fibra product line

KeyPad TouchScreen Fibra

Wired keypad with touch screen and contactless authentication.





GRADE





KeyPad TouchScreen Fibra is a device of the wired **Fibra product line**. Only accredited Ajax Systems partners can sell, install, and administer Fibra products.


Intelligent security and automation management

KeyPad TouchScreen is developed for easy-to-view security and convenient control. With the graphical interface and sound notifications, all the users' commands and the system's responses are perfectly expressed. The keypad clearly shows if a command is accepted. For example, it shows the cause of the malfunction during the integrity check. The users are always aware of the system status and what actions should be taken.

Key features

- Easy security groups management
- Control tab for automation devices
- Sound notification for alarms, door opening (Chime), delays, and other events
- Keypad activation when user approaches the device
- Automatic backlight brightness control
- On-screen notification with the cause of the malfunction when arming

Three fast and secure authentication methods

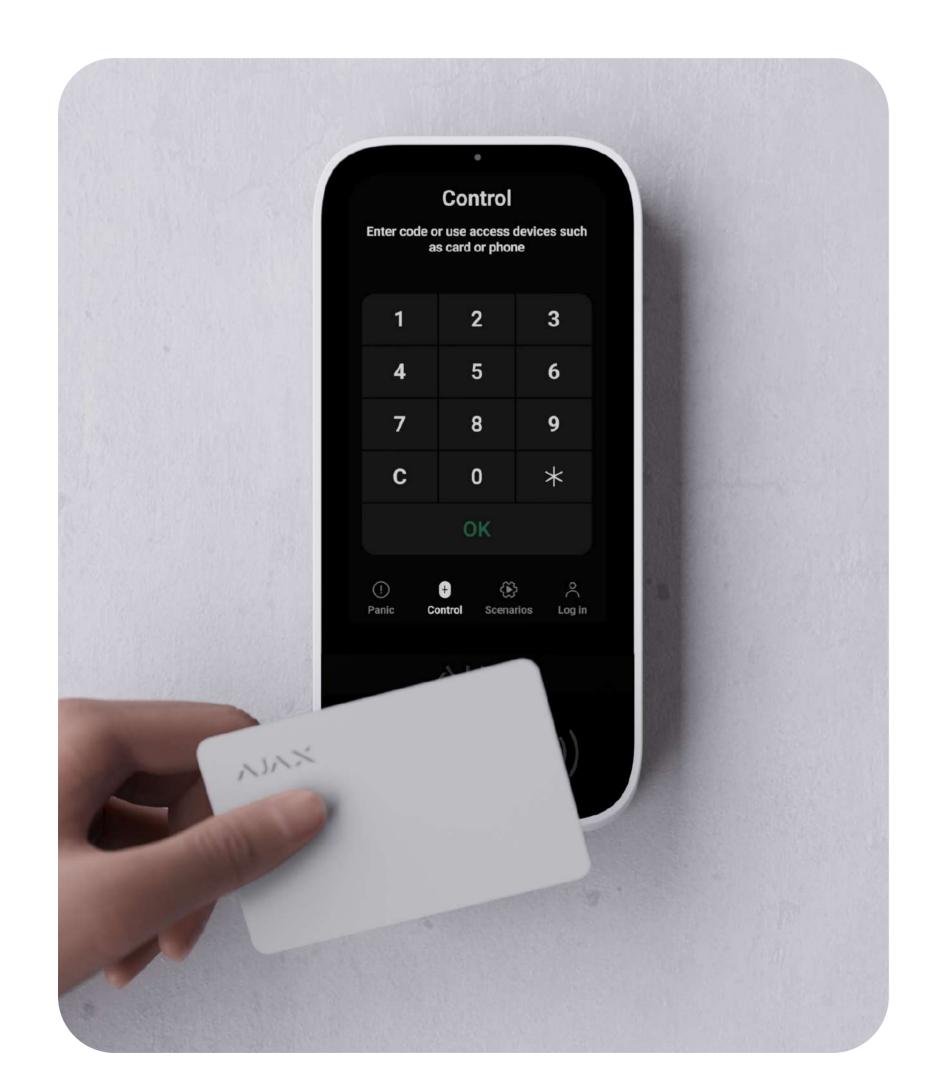

Pass card or Tag key fob



Code



Smartphone



All set in case of emergency

- Keypad locking when someone tries to guess the code
- Duress code
- Protection against authentication via unauthorized access devices
- Three panic buttons: alarm, fire, and auxiliary



Fibra

communication technology

- Up to 2,000 m of wired communication between the keypad and the hub
- Data is encrypted throughout the transmission process
- Regular polling to display current device status
- Devices of different types can be connected to a line



Easy setup and configuration

- Installation on the SmartBracket mounting panel without disassembling the enclosure
- Pairing with the hub via QR code or automatic line scanning
- Remote control and configuration in the apps



Complex sabotage protection

- Tamper alarm
- Protection from short circuit on the Fibra line
- Device authentication to prevent spoofing

Superior, Fibra, and **Baseline** product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

Compliance	Communication with control panel	Enclosure	Features
EN 50131 (Grade 3) (in progress)	Fibra communication technology	Colours	Contactless access
PD 6662:2017	3 A 40	white, black	Pass cards and Tag key fobs (up to
	Wired connection		50 devices)
	U/UTP cat.5 4×2×0.51	Dimensions	
Compatibility	(copper conductor)	171.3 × 82.1 × 28.4 mm	Support for BLE (up to 50 smartphones)
Hub Hybrid (2G)	Communication range	Weight	
Hub Hybrid (4G)	up to 2,000 m	TBC	Access codes
	With U/UTP cat.5 4×2×0.51		up to 50 personal codes for
		Tamper alarm	registered users
Power supply			
			up to 50 codes for unregistered
Fibra line			users
8.5-30 V==	Display	Installation	
			1 keypad code
Backup power supply	Type	Operating temperature range	
	IPS, capacitive touch screen	from -10°C to +40°C	Duress code
			up to 50 personal duress codes
Complete set	Diagonal	Operating humidity	
- -	5"	up to 75%	1 keypad duress code
KeyPad TouchScreen Fibra			
SmartBracket mounting panel	Resolution		Panic buttons
Installation kit	480 × 854 px		Alarm, fire, auxiliary
Quick start guide			



For detailed information, scan the QR code or follow the link: ajax.systems/support/devices/keypad-touchscreen-fibra/











ajax.systems