



**CODE:** PU-NC301B v1.0/II  
**NAME:** Twisted pair wire, U/UTP, cat 5e, 24AWG, Cu, Fca, 500m (outdoor)

**EN**

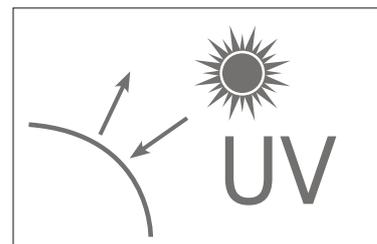

UV resistance

## U/UTP

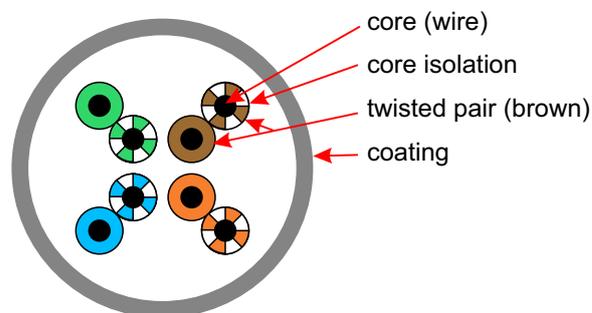

### DESTINATION

PU-NC301B cable is twisted pair U / UTP, category 5e cable. It can be used for data transmission and power transmission (PoE). It can be used in many systems, i.e. ICT systems, IP video monitoring systems (especially recommended for IP PoE systems), but it will also work well in HD digital closed-circuit television systems (CVI, TVI, AHD). Cable is intended for professional installations inside buildings and complies with the PN-EN 50575 (CPR) standard.

### TECHNICAL DATA

<b>Type of cable:</b>	Twisted pair wire
<b>Shield type / Shielding:</b>	U/UTP (unshielded cable)
<b>Category:</b>	5e
<b>Outside diameter of wire / core:</b>	5,3mm / 0,5mm (AWG24)
<b>Coating/core material:</b>	PE / Cu (99,99%)
<b>Coating colour:</b>	Black - RAL9005
<b>Reaction to fire class:</b>	Fca
<b>Destination:</b>	outdoor
<b>Operating temperature:</b>	-20°C+50°C
<b>Laying temperature:</b>	-20°C+50°C
<b>Bending radius:</b>	40mm
<b>Cable length in package:</b>	<b>500m</b>
<b>Type / dimensions of packaging:</b>	Drum / Ø=365, H=192 [+/- 2mm]
<b>Net / gross weight:</b>	13,46 / 13,46 [kg]
<b>Declaration, warranty:</b>	CE, CPR, DoP, 2 years
<b>Notes:</b>	Marker on cable every 1m UV resistance