

DH-PFA155A

Anti-corrosion Pole Mount Bracket



- Stainless steel, neat & Integrated design
- Diameter range of the clamp: 80 mm–150 mm (3.15"–5.91")
- Strong load-bearing capacity: Supports a maximum weight of 7 kg (15.43 lb).
- Anti-corrosion: NEMA 4X (200 hours) rated.



Aesthetic Design

Easy Installation

Series Overview

Raising the bar on modern brackets, the anti-corrosion pole mount bracket blends reliability and sophistication into one design. Built to be sturdy with its stainless steel metal plate structure, it is both strong and hassle-free to install. The surface is spray-coated with one of the most effective anti-corrosion agents available today, meeting the criteria of NEMA 4X (200 hours). With its integrated design, this bracket outperforms most basic brackets, meeting the needs of locations such as coastal areas, chemical plants and businesses in the energy industry that require anti-corrosion products.

Product Dimensions	137.0 mm x 137.0 mm x 252.0 mm (5.39" x 5.39" x 9.92") (L x W x H)
Gross Weight	1.03 kg (2.27 lb)
Applicable Camera	Suitable for PTZ, bullet and dome cameras, please see "Accessory Selection"

Ordering Information

Type	Model	Description
Camera Mount	DH-PFA152A-E	Pole Mount Bracket

Technical Specification

Model

Model	DH-PFA155A
-------	------------


Environment

Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	< 90% (RH)
Protection	Corrosion-proof, meets the criteria of NEMA 4X

Structure

Material	Stainless steel
Installation	Pole Mount
Mast Diameter	Φ80 mm–150 mm (Φ3.15"–5.91")
Color	Dahua white
Load bearing	7 kg (15.43 lb)
Dimensions	170 mm x 130.4 mm x 45 mm (6.69" x 5.13" x 1.77") (L x W x H)
Net Weight	0.85 kg (1.87 lb)

Installation

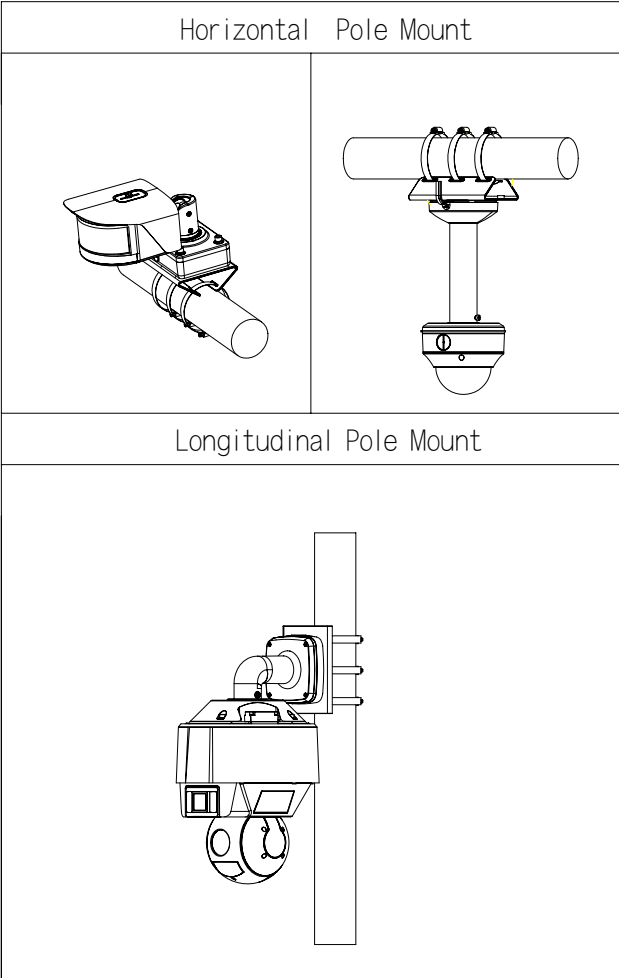

Dimensions (mm[inch])

