


DH-PFA162-SG

Universal Joint



Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, and works in temperatures ranging from –40 °C to +60 °C (–40 °F to +140 °F) and in environments with a relative humidity of less than 90%.

Technical Specification

Structure

Casing Material	Aluminum alloy
Product Dimensions	115.0 mm × 115.0 mm × 98.8 mm (4.53" × 4.53" × 3.89") (L × W × H)
Appearance Color	Silver gray
Net Weight	0.48 kg (1.06 lb)
Gross Weight	0.56 kg (1.23 lb)
Load Bearing	6.0 kg (13.23 lb)
Installation	Plane mount
Adjustable Inclination Angle	–30° to +30°
Applicable Model	Please see "Camera Accessories Selection"
Packaging Dimensions	137 mm × 123 mm × 110 mm (5.39" × 4.84" × 4.33") (L × W × H)

- Built of aluminum alloy.
- Suitable for a variety of cameras and is elegant.
- Supports being adjusted to multiple angles to suit the needs of various installation locations.




Environment

Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	<90% (RH)
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Basic Protection *The products are designed for general use and are applicable even in areas with no specific requirements for anti-corrosion protection. Basic Protection


Ordering Information

Type	Model	Description
Camera Mount	DH-PFA162-SG	Universal Joint

Installation

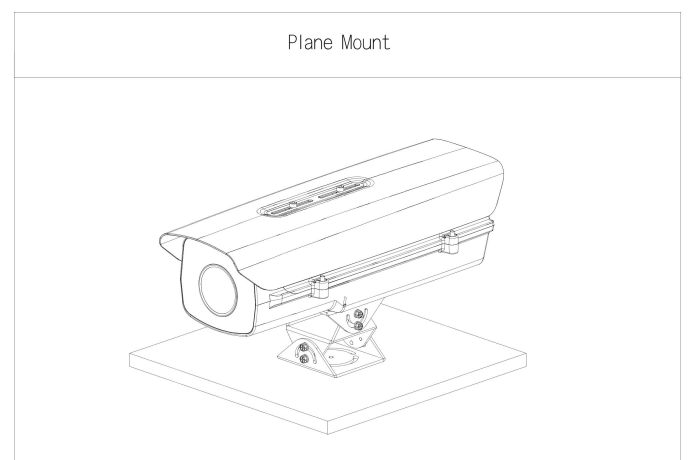

Dimensions (mm[inch])

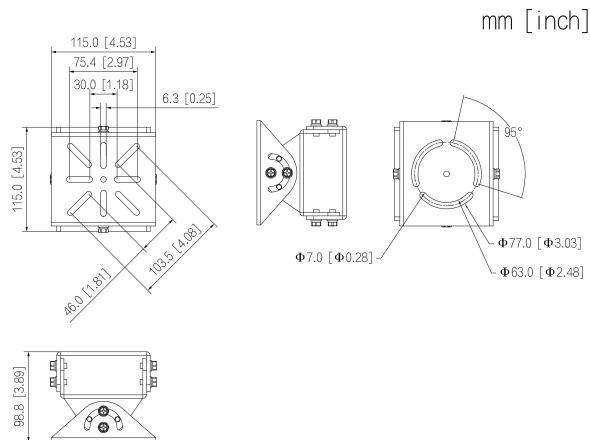

Package Information

- Universal joint x1
- 1/4-20x12UNC screw x2
- M6x14 screw x2