


DS-D5055UL-B 54.6" 4K Monitor



Key Features

- Industrial grade A+ LCD panel
- Designed for surveillance, high reliability and stability
- Abundant varieties of interfaces: BNC, VGA, digital interface and diversified interfaces
- 4K resolution is 4 times 1080P can own broader view and more abundant details
- 16.7 million color, display picture perfectly
- Support horizontal and vertical display
- Horizontal 178°, Vertical 178°
- Dedicated project RS232 interface
- Build-in loudspeaker, audio visual connection
- VESA standard
- Metal shell

Interfaces

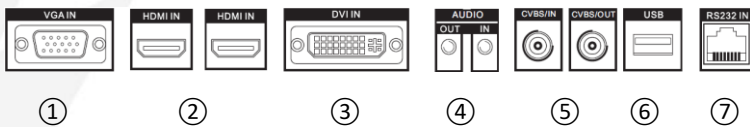

NO.	Description
1	VGA IN
2	HDMI IN
3	DVI IN
4	AUDIO IN/OUT
5	CVBS IN/OUT
6	USB Interface
7	RS-232 IN

Model



DS-D5055UL-B




Specifications

Model	DS-D5055UL-B			
Backlight	LED Backlight			
Screen Size	54.6"			
Pixel Pitch	0.315 mm * 0.315 mm			
Max Resolution	3840 × 2160			
Brightness	500 cd/m ² (Typical)			
Contrast	1100 : 1			
Response Time	8 ms			
Color	10 bit, 1.07B			
Active Area	1233.4 × 706.8 mm			
Viewing Angle	Horizontal 178°, Vertical 178°			
Interfaces	HDMI input	2	Audio input	1
	VGA input	1	Audio output	1
	DVI input	1	USB interface	1
	CVBS(BNC) input	1	Network	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
	CVBS(BNC) output	1	RS-232 interface	1
Power Supply	AC 100~240V, 50/60 Hz			
Power Consumption	≤ 100W			
Standby Power Consumption	< 1 W(Standby)			
Loudspeaker	5W x 2			
Working Temperature	0 °C ~ 40 °C(32°F ~ 104°F)			
Working Humidity	10% ~ 90% (No Condensation)			
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)			
Storage Humidity	5%~90% (No Condensation)			
Color of Casing	Black			
VESA	4-M6 200 mm * 300 mm			
Dimensions(W*H*D)	1262.1 mm(W)*742.9 mm(H)*55.7 mm(D)			
Packing Dimensions(W*H*D)	1395 mm * 295 mm * 890 mm			
Gross Weight	41 kg			
Net Weight	35 kg			
Accessories	Power cord	1		
	User manual	1		
	Warranty card	1		
	Remote control	1		
	CD	1		
	Battery	2		
Bracket	Pedestal	Optional	DS-DM5501B	
	Wall mounted	Optional	DS-DM4255W	
*Note	All specifications mentioned above are subject to the actual product			

Dimensions (unit: mm)

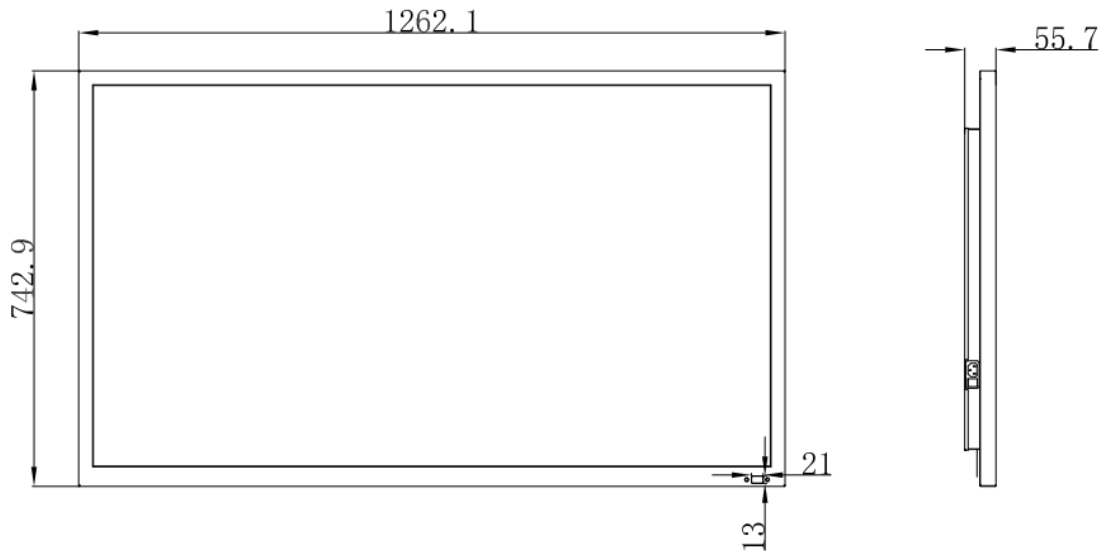

Distributed by

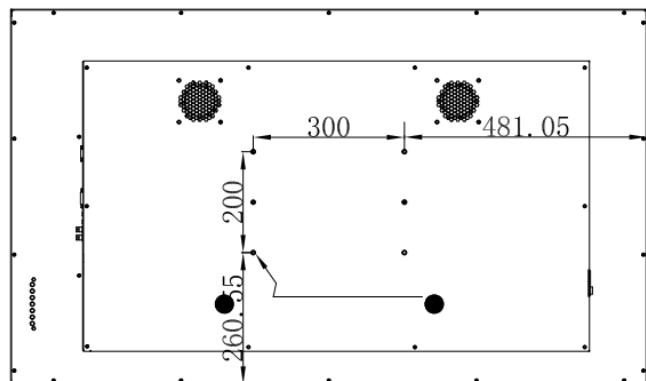

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761