

VTO3211D-P2

IP 2-button Villa Outdoor Station



Features

- HD CMOS camera
- Aluminum panel, IP65, IK08
- ICR Night vision & Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP
- Surface mounted



Technical Specification

Model	VTO3211D-P2
-------	-------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/2.8" 2MP CMOS
Focal Length	1.9mm
Angle of View	H:140°
Day/Night	ICR, 5m

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Operation Mode

Keypad	2 Mechanical Buttons
--------	----------------------

Interface

Door Control	1
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1

Network


Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP


General

Ingress Protection	IP65, IK08
Tamper Switch	1
Installation	Surface
Material	Aluminum
Power	DC 12V, PoE(802.3af)
Power Consumption	Standby ≤1W, Work ≤7W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	182.0mm×30.0mm×101.0mm
Weight	0.8Kg

Dimensions

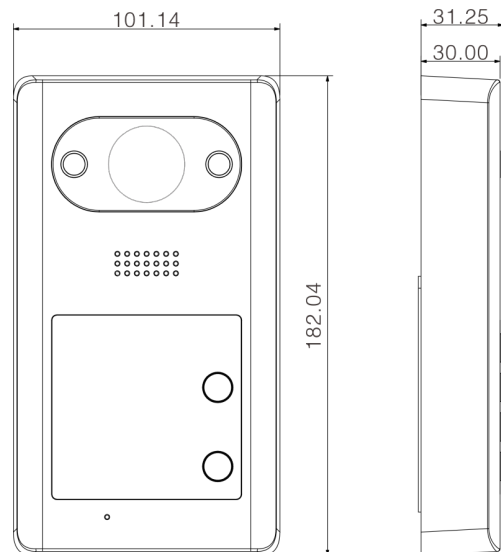

View Area

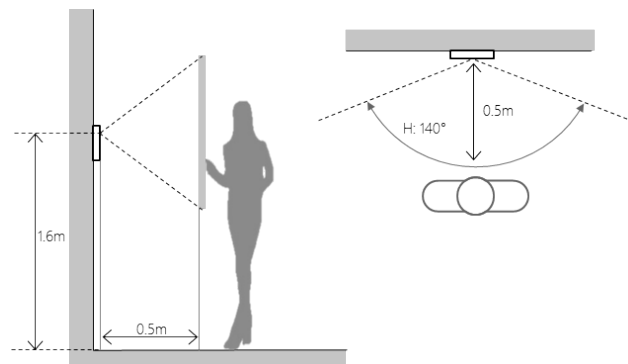

Application

