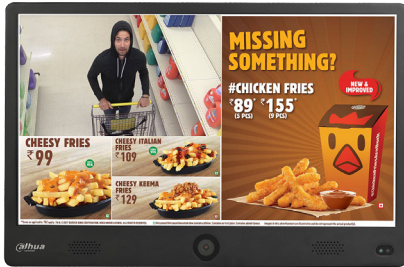


LFH22-LAI200

21.5" Indoor Public View Monitor

**Features :**

- Industrial Design: industrial LCD panel, FHD resolution, all-metal design, narrow frame design.
- Built-in camera: 1/2.7 inch CMOS, 2 MP@25fps, 3.6mm fixed lens, H.265 and H.264+ encoding.
- Built-in SD card slot: supports maximum 128G micro SD local storage and playback.
- Front Speakers: special front speakers design, brings clear voice rather than a rear speakers design.
- “3” Work mode: smart mode, signage mode and CCTV mode for different applications as you need.
- PVM +NVR + Platform: support real-time preview, playback, storage and management by NVR and platform.
- PVM & Digital signage: combining commercial and security brings more commercial value for customers.

Technical Specification

Specification

Model	LFH22-LAI200
Panel size	21.5" TFT LCD
Display Ratio	16:9
Maximum resolution	1920×1080
Display color	16.7M
Brightness (nits)	250cd/m ²
Contrast	3000:1
Viewing angle	178°/178°
Response time	18ms
Backlight	LED

Performance

System	Android 4.4
CPU	Quad-core, 1.5GHz
RAM	1GB
Internal Storage	8GB
Decoding Ability	4CH@1080P
Network Mode	Wired, WiFi
Built in Loudspeaker	8Ω/2W×2



Interface

RJ45	1
USB 2.0	2
SD Card Slot	1
TF Card Slot	1
RS232	1

Others

Dimension	508×337×38mm
Package Size	600×471×130mm
Net Weight	5.9kg
Body Material	Metal Plate
Installation	Wall-mounted
Display Mode	Horizontal, Vertical
Power	DC12V
Standard Consumption	17.6W
Standby Consumption	0.3W
Work Environment	Temperature: -10 C ~ +55 C
	Humidity: 10%~90%

IPC Parameters

Image Sensor	1/2.7" CMOS
Effective Pixels	1920×1080
Lens Type	Fixed
Focal Length	3.6mm
Minimum Illumination	Manual 1/30s 1/25s(30 IRE) 0.15Lux/F2.0 (Color), 0.039Lux/F2.0(BW) Manual 1/3s 1/4s(100 IRE) 0.0158Lux/F2.0(Color), 0.000131Lux/F2.0(BW)

Dimensions(mm)

