

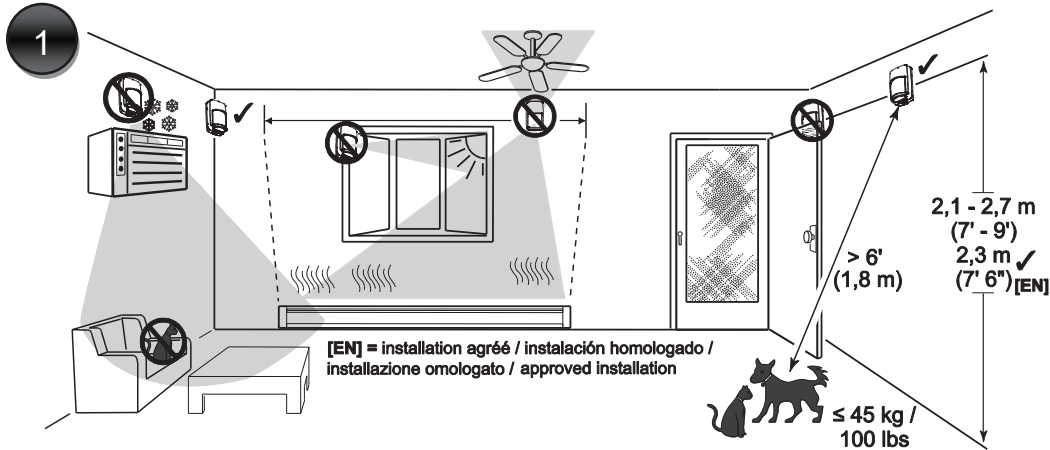




DT8012F24 DUAL TEC® Motion Sensor

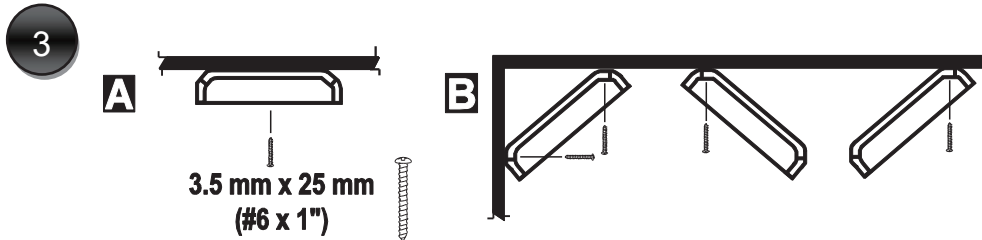

L'immunité aux petits animaux peut varier. Réaliser un test de détection afin de vérifier le niveau d'immunité.
Para aplicaciones con mascotas, utilice el test de andado para determinar el nivel de inmunidad contra mascotas alcanzable.
L'immunità agli animali varia, utilizzare il walk test per determinare il livello di attendibilità del pet immunity.
Pet applications vary, walk test to determine attainable pet immunity level.

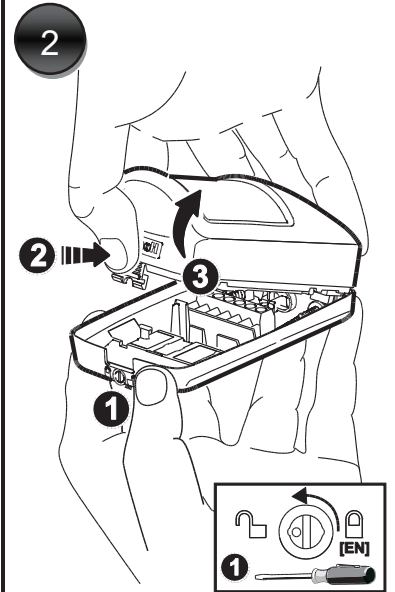

Ne pas trop serrer les vis
No apriete demasiado los tornillos
Non stringere troppo le viti
Do Not over tighten the screws

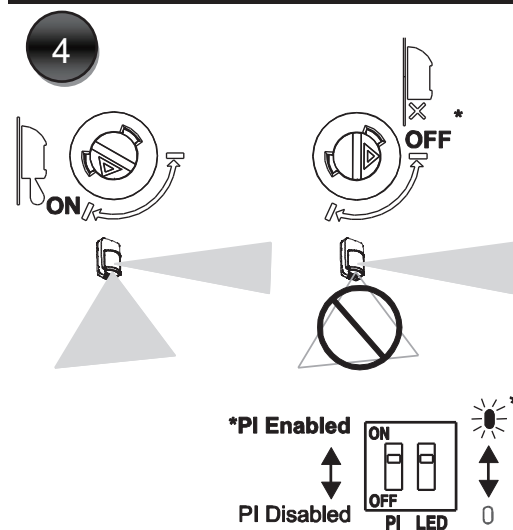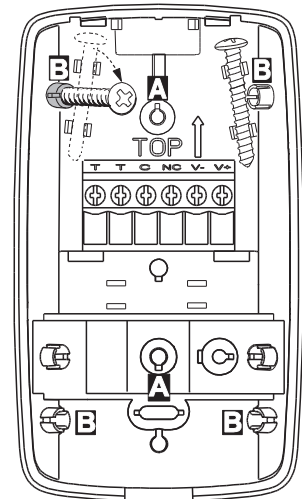

l'immunité aux petits animaux
Inmunidad para mascotas
Immunità agli animali domestici
Pet Immunity



* Réglage usine / valores de fábrica / programmazione di fabbrica / factory default

Réglage de la portée hyper
Ajuste del rango de detección
Regolazione della portata
Microwave Range Adjustment




Remarque: Réglée au minimum, la couverture du détecteur est réduite à 5m.



Nota: Ajuste en mínimo, el rango del sensor se reduce a 5m.

Nota: impostare al minimo, la portata del sensore è ridotta a 5m.

Note: Set at minimum, the sensor range is reduced to 5m.



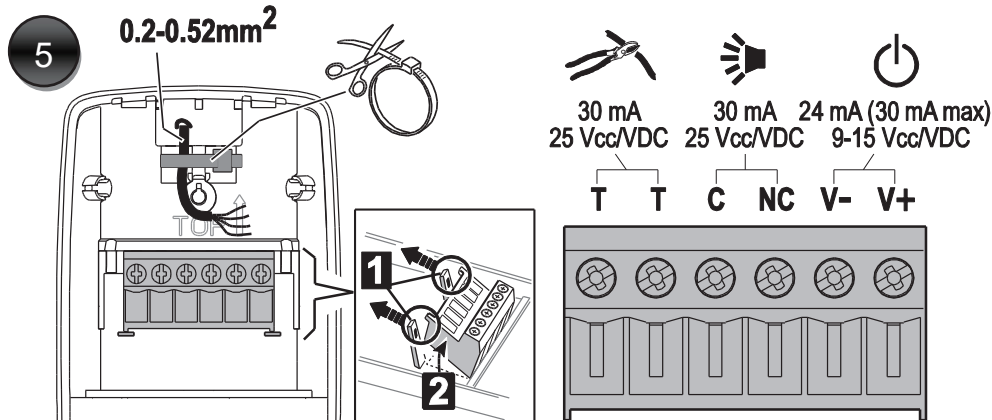


Control Panel

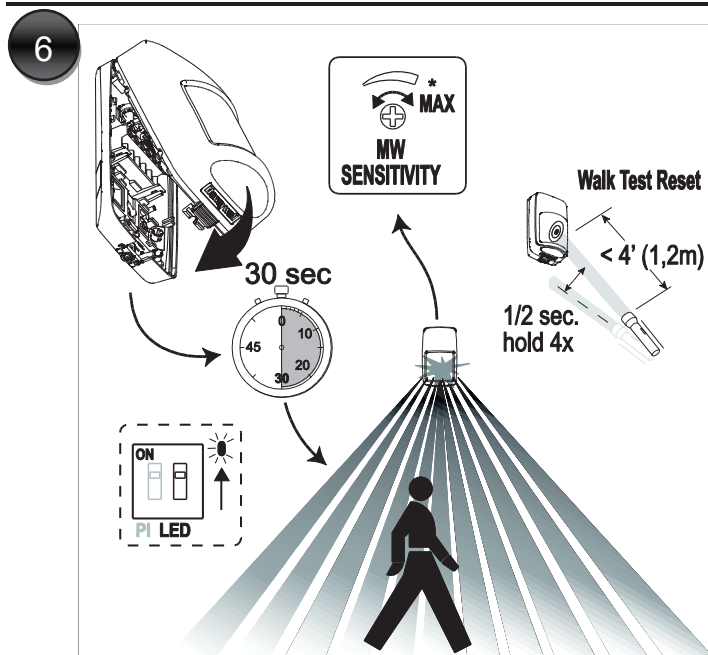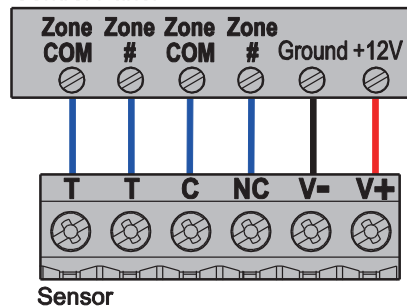


LED	Power Up	Walk Test	Normal	Fault
Red	Slow Blink	ON Alarm	ON Alarm	Fast Blink
Yellow	OFF	ON Microwave	OFF	OFF
Green	OFF	ON PIR	OFF	OFF

7 Vue de dessus / Vista Desde Arriba / Vista in pianta / Top View

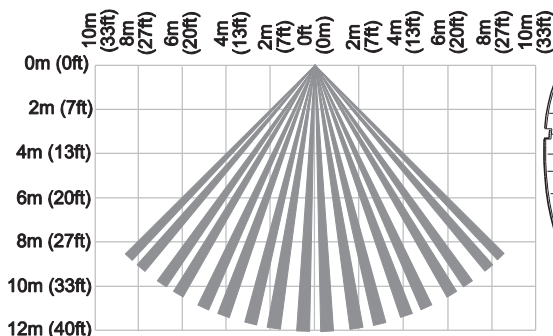

Vue de coté / Vista Lateral / Vista in sezione / Side View

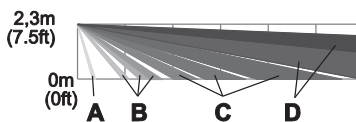

Zones / Zonas / Zone di rilevazione / Zones	
A	2 Basses / Ángulo 0 / Antistrisciamento / Look-down
B	18 Cortes / Corto / Inferiori / Lower
C	46 Intermédiaires / Intermedias / Intermedie / Intermediate
D	36 Longues / Largo / Lunga portata / Long

Détails en ligne
Detalles en línea
Dettagli in linea
Details online

IMPORTANT : Le détecteur doit être testé au moins une fois par an.
Importante: El sensor debe comprobarse al menos una vez al año.
Importante: È necessario sottoporre il sensore a test almeno una volta l'anno.
IMPORTANT: The sensor should be tested at least once each year.

Approval Listings:

CE	Logo de conformité CE. Ce produit est conforme à la législation d'harmonisation dans l'Union européenne pertinente. Logotipo de cumplimiento de CE. Este producto cumple con la legislación de uniformidad de la Unión Europea pertinente. Logo conformità CE. Questo prodotto è conforme alla legislazione armonizzata pertinente dell'Unione Europea. CE compliance logo. This product is in conformity with the relevant European union harmonisation legislation=
DEEE	Le symbole DEEE. Il indique que ce produit doit être recyclé et qu'il ne doit pas être jeté à la poubelle. Simbolo WEEE Indica che este producto es para reciclar y que no se debe arrojar al cubo de basura. Simbolo RAEE. Indica che questo prodotto deve essere riciclato e non può essere gettato nel secchio della spazzatura. The WEEE symbol. It indicates this product is to be recycling and not been thrown away in a dustbin.

NOTES:

- EN50131-2-4, Security Grade 2, Environmental Class II. Suitable for connection to an EN 60950 Class II Limited Power Source.
- In EN 50131-2-4 compliant installations, mount the sensor at 2.3m, set the microwave sensitivity to maximum and lock the sensor housing with the cover lock (see "[EN]" where noted in Steps 1-4).

NF&A2P 2 boucliers (référentiel NF324-H58)
et conforme aux normes EN50131-2-4 et
RTCS0131-2-4; IP30 IK04
DT8012F24 - N° de certificat: XXXXXXXXXX
Organisme de certification:
CNPP Cert.: www.cnpp.com et
AFNOR Cert.: www.marque-nf.com

Honeywell Security Group
(UK07)
Newhouse Industrial Estate
Motherwell
ML1 5SB Lanarkshire
Scotland
TEL: +44(0) 1698 738500
FAX: +44(0) 1698 738300
securitysales@honeywell.com



DT8012F24

12Vcc/dc
30 mA max

PD6662:2017

Pour toutes informations supplémentaires, se référer svp à notre site Web :
Para cualquier información adicional, por favor visite nuestra Website:
Mer information finns på vår webbplats: Voor verdere informatie, bezoek aub onze website op:
Per ogni ulteriore informazione, si prega di fare riferimento al nostro sito Web:
Дополнительную информацию см. на нашем веб-сайте:
For any additional information, please refer to our Website:
<http://www.honeywell.com/security/uk/hscdownload>

For Patents, see www.honeywell.com/Patents.

Ou contacter : / o_contacte con: / o contattare: / or contact:

Honeywell Security Group
Newhouse Industrial Estate
Motherwell
Lanarkshire ML1 5SB
United Kingdom
Tel: +44(0)1698 738200
Email: UK64Sales@Honeywell.com



Contactar un revendedor Honeywell autorizado para obtener des informaciones sur la garantía de ce produit.
Por favor contacte con su distribuidor Honeywell Security para información sobre la garantía del producto.
Contatti il suo rappresentante Honeywell per ulteriori informazioni sui prodotti e garanzia.
Please contact your local authorized Honeywell representative for product warranty information.

© 2019 Honeywell International Inc.
Honeywell and DUAL TEC are registered trademarks of
Honeywell International Inc. All other trademarks are the
properties of their respective owners. All rights reserved.

P/N 800-15115-01 Rev H

Honeywell