

ENTRANCE PANEL

AA-12FB

EAN: 5060514912829 (BLACK)


EAN: 5060514912843 (GOLD)

EAN: 5060514912836 (SILVER)

BAS-IP AA-12FB is a multi-apartment entrance panel with face recognition and support for mobile access **BAS-IP UKEY**. Its modern design and the incorporation of highly useful features make it an ideal solution for residential complexes and cottage settlements.

The unique feature of this panel is the fact that all its buttons are piezoelectric.

BAS-IP AA-12FB is available in silver, gold, and black.

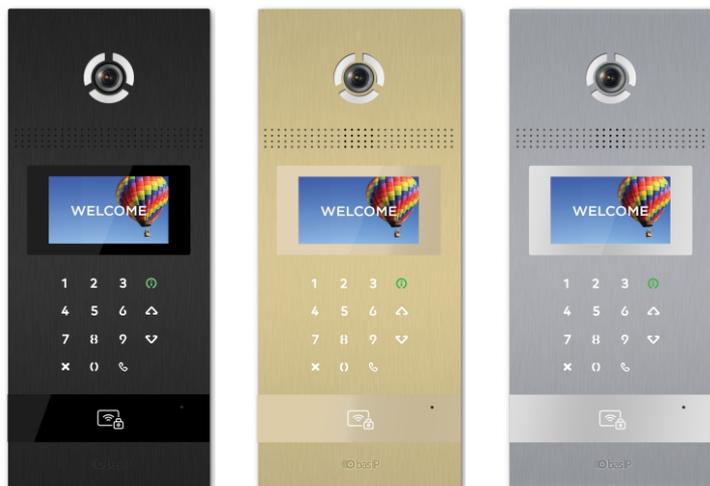


BLACK

GOLD

SILVER

Main features

- Panel type: Multi-apartment.
- Display: 4.3" TFT, color with backlight.
- Keypad: Backlight piezo buttons.
- Camera: 1/4".
- Resolution: 2 Mp.
- Camera angle: 110° (horizontal).
- Output video: Full HD (1920 × 1080), H.264 Main Profile.
- Night backlight: 6 LEDs.
- Light sensitivity: 0,01 LuX.
- Protection class: IP65.
- IK-Code: IK07.
- Working temperature: -40 — +65 °C.
- Power consumption: 6,5 W, in standby — 3,6 W.
- Power supply: +12 V DC.
- Body: Aluminum.
- Colors: Silver, Gold, Black.
- Dimensions for installation: 142 × 358 × 58 mm.
- Size of the panel: 161 × 382 × 49 mm.
- Installation: Flush, surface with BR-AA12 bracket.

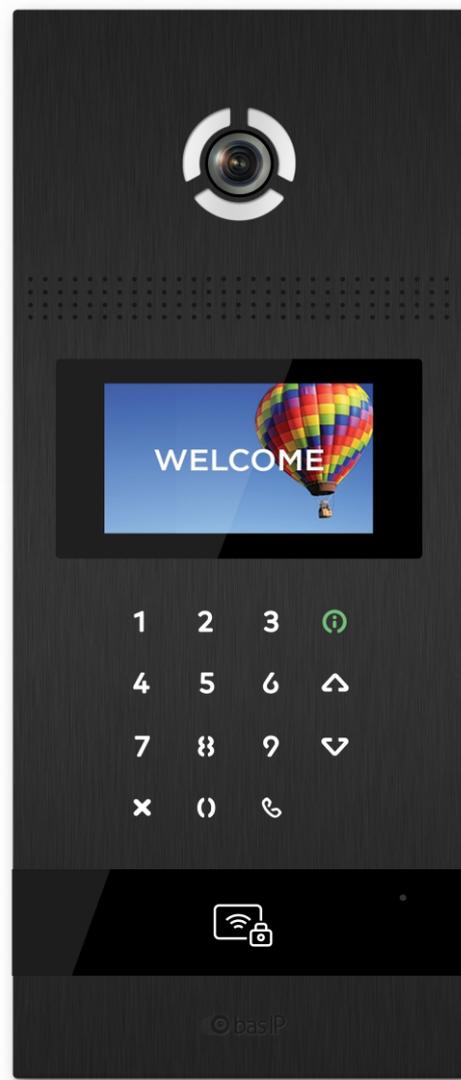

Functionality

- **Interface:** Multi-language graphical and WEB interface.
- **Lock opening:**
 - By means of a monitor
 - Face Recognition Identification
 - By QR code
 - By guest link
 - By Pin
 - By access card
 - By license plates
 - The BAS-IP Intercom app
 - The BAS-IP Link app
 - The BAS-IP UKEY app
 - From API
- **Access control integration:** WIEGAND-26+ output
- **Shortcut buttons:** Concierge button.
- **Number of call melodies:** 4 polyphonic melodies, ability to customize melodies for different actions.
- **Authentication:** Separate password for settings, WEB – interface and RTSP stream.
- **Talking mode:** Full duplex.
- **Additionally:**
 - Software Link support
 - SIP P2P
 - Built-in relay
 - Proximity sensor
 - Open API