

## iDS-7732NXI-M4/16P/X DeepInMind M Series



- Up to 2-ch@32 MP/2-ch@24 MP/4-ch@12 MP/8-ch@8 MP/16-ch@4 MP/32-ch@1080p decoding capacity
- H.265+/H.265/H.264+/H.264 video formats
- Up to 32-ch IP cameras can be connected, plug & play with 16 power-over-Ethernet (PoE) interfaces
- Intelligent analytics based on deep learning algorithm
- Up to 24-ch perimeter protection
- Up to 16-ch facial recognition for video stream, or up to 32-ch facial recognition for face picture
- Up to 12-ch video structuralization
- Up to 8-ch IP speakers can be connected

## ▪ Function

### Professional and Reliability

- 1、 H.265+ compression effectively reduces the storage space by up to 75%
- 2、 Dual-stream recording saves bandwidth
- 3、 Adopt stream over TLS encryption technology which provides more secure stream transmission service
- 4、 Support double verification for playback and downloading

### HD Video Output

- 1、 Provide independent HDMI and VGA outputs
- 2、 HDMI video output at up to 8K resolution or dual 4K resolution

### Storage and Playback

- 1、 Up to 4 SATA interfaces for HDD connection
- 2、 Up to 16-ch synchronous playback

### Smart & POS Function

- 1、 Support multiple VCA (Video Content Analytics) events
- 2、 Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR (Automatic Number-Plate Recognition), and people counting
- 3、 POS information overlay on live view and playback, and POS triggered recording and alarm

### Network & Ethernet Access

- 1、 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- 2、 Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 3、 Smooth streaming technology
- 4、 Support web access without plug-in

## ▪ Specification

<b>Intelligent Analytics</b>	
AI by NVR	Facial recognition, perimeter protection, video structuralization, AcuSearch
AI by Camera	Facial recognition, perimeter protection, video structuralization, AcuSearch, motion detection2.0, ANPR, people counting, VCA
Engine	2, each engine can run an intelligent algorithm, engine mode is adjustable
<b>Facial Recognition</b>	
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Face Picture Library	Up to 16 face picture libraries, up to 100,000 face pictures in list library, up to 10,000 face pictures in stranger library, up to 5,000,000 face pictures in face capture (each picture ≤ 4 MB, total capacity ≤ 20 GB)
Face Picture Comparison (Captured from Camera)	32-ch (24-ch for each engine); Comparison speed: 48 pictures per second
Facial Detection and Analytics Performance	16-ch 2 MP (8-ch for each engine), up to 8 MP
<b>AcuSearch</b>	
By NVR	up to 8-ch, up to 691,200 targets/day
By Camera	All channels, up to 691,200 targets/day The camera should enable AcuSearch function
<b>Perimeter Protection</b>	
By NVR	perimeter protection powered by Large Model: 12-ch 2 MP or 8-ch 4MP or 4-ch 8MP perimeter protection without Large Model: 24-ch 2 MP or 16ch-4MP or 8-ch 8MP
By Camera	perimeter protection powered by Large Model with AcuSense cameras: All channels
<b>Video Structuralization</b>	
Structured Analysis	12-ch 2 MP (6-ch for each engine), up to 8 MP
Face Picture Library	Up to 16 face picture libraries, up to 100,000 face pictures in list library, up to 10,000 face pictures in stranger library, up to 5,000,000 face pictures in face capture (each picture ≤ 4 MB, total capacity ≤ 20 GB)
Face Picture Comparison	16-ch; Comparison speed: 32 pictures per second
<b>ANPR</b>	
By Camera	All channels
Vehicle Attributes	Vehicle brand, vehicle color, vehicle type
Plate Attributes	Plate number, license plate color, license plate type
<b>Video and Audio</b>	
IP Video Input	32-ch Up to 32 MP resolution
Incoming Bandwidth	320 Mbps
Outgoing Bandwidth	400 Mbps
HDMI 1 Output	8K (7680 × 4320)/30Hz, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz
HDMI 2 Output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz *: When HDMI 1 output resolution is 8K, the maximum HDMI 2 output resolution is 1080p.


Video Output Mode	HDMI1/VGA1 simultaneous output, HDMI1/HDMI2 independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 kΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)
VGA Output	1920 × 1080/60Hz
<b>Decoding</b>	
Decoding Format	H.265/H.265+/H.264/H.264+
Decoding Capability	2-ch@32 MP (30 fps)/2-ch@24 MP (30fps)/4-ch@16 MP (30fps)/8-ch@8 MP (30fps)/16-ch@4 MP (30fps)/32-ch@2 MP (30fps)
Synchronous Playback	16-ch
Recording Resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
<b>Network</b>	
Remote Connection	128
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP
API	ONVIF (profileS/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network Interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Camera Access Protocol	ONVIF(Version 2.5), RTSP
<b>PoE</b>	
Interface	16 RJ-45 10/100 Mbps self-adaptive Ethernet interfaces
Power	≤ 200 W
Standard	IEEE 802.3 af/at
<b>Auxiliary Interface</b>	
SATA	4 SATA interfaces; 3.5-inch HDD
eSATA	1 eSATA interface
Capacity	Up to 16 TB capacity for each HDD
Serial Interface	1 RS-232, 2 RS-485 (half-duplex)
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
Alarm In/Out	16/4
<b>General</b>	
GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 50 W (without HDD and PoE off)
Working Temperature	-10 to 55°C (14 to 131° F)
Working Humidity	10 to 90%
Dimension (W × D × H)	440 × 391 × 72 mm ( 17.3" × 15.4" × 2.8")
Weight	≤ 5 kg (without HDD, 11 lb.)
<b>Certification</b>	
Obtained Certification	CE, FCC, IC, CB, KC, UL, Rohs, Reach, WEEE, RCM, UKCA, LOA, BIS
FCC	Part 15 Subpart B, ANSI C63.4-2014

CE

EN 55032:2015+A1:2020, ENIEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020

### Physical Interface


No.	Description	No.	Description
1	Network interfaces with PoE function	7	VGA output
2	USB 3.0 interface and LAN interface	8	RS-232 serial interface
3	eSATA interface	9	Alarm in, alarm out, and RS-485
4	Audio in and audio out	10	GND
5	HDMI 1 and HDMI 2 interfaces	11	100 to 240 VAC power supply
6	CVBS video output	12	Power switch

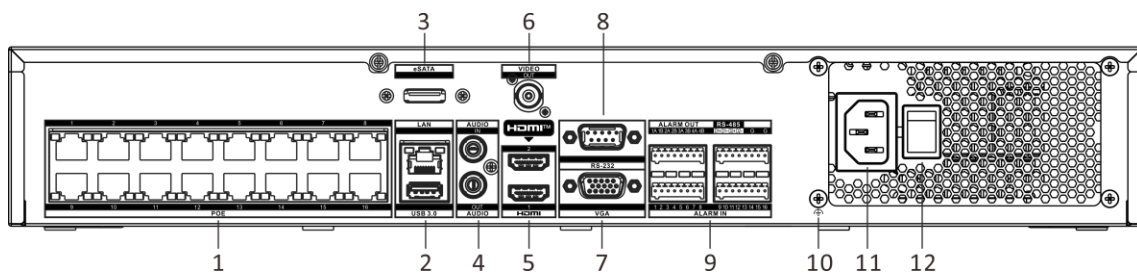

### Available Model

iDS-7732NXI-M4/16P/X

▪ Dimension

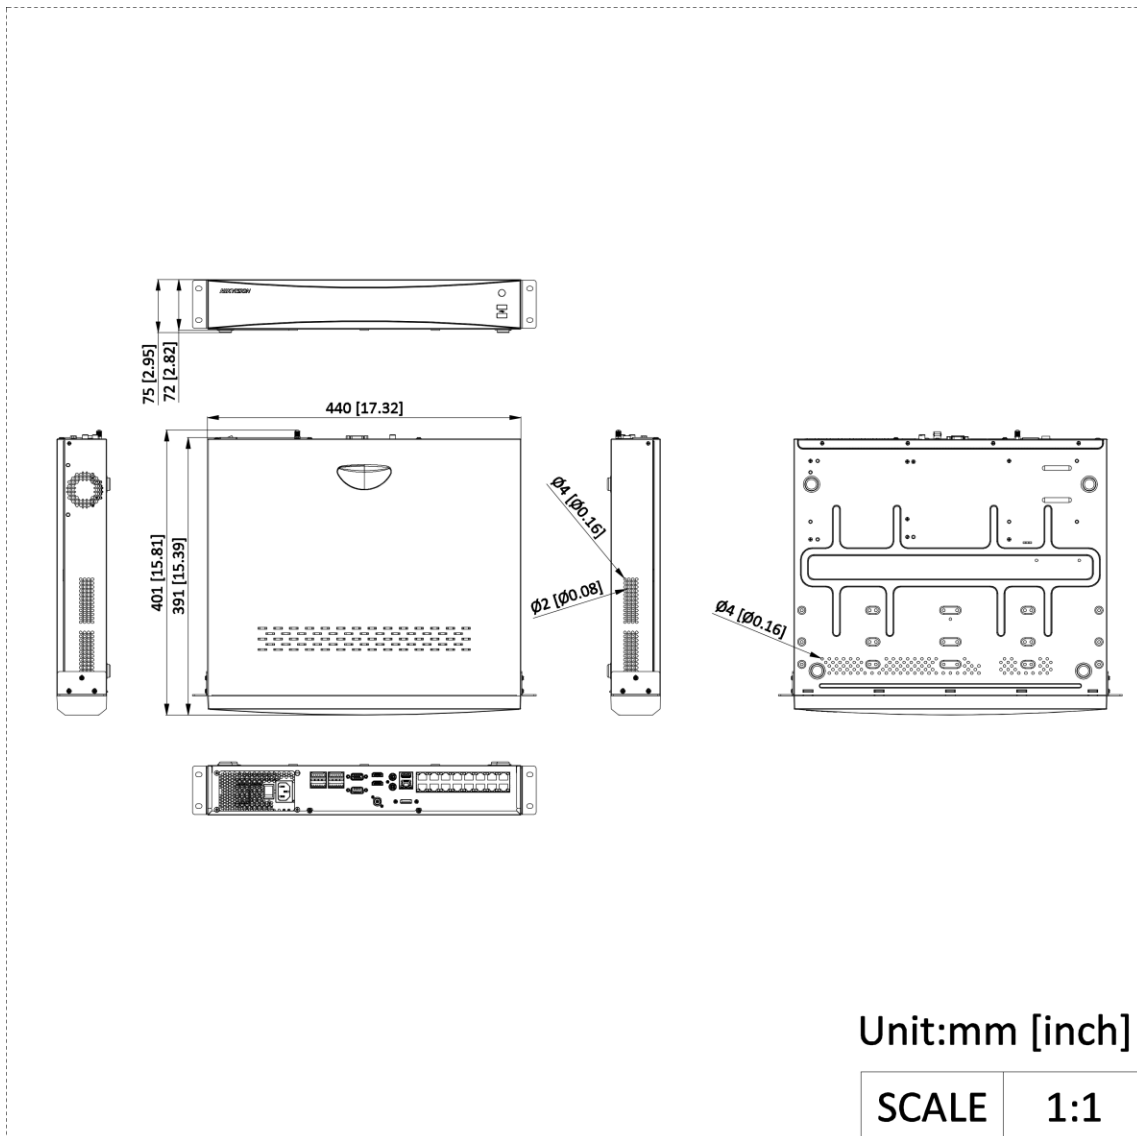

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

